



DISPENSER

ELEGANTE^D

Quiet and compact, GWS Industries domestic water dispensers meet the growing demand of the domestic dispensing market by covering a wide segment of needs. They are available in undercounter and overcounter versions, with internal or external carbonation-filtration unit.



ELEGANT



ECOLOGICAL





SILENT





SUSTAINABLE

IN

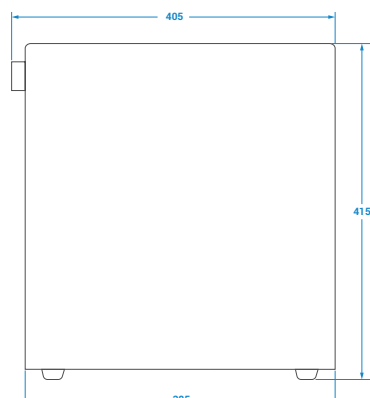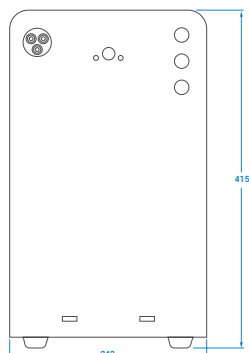

UP

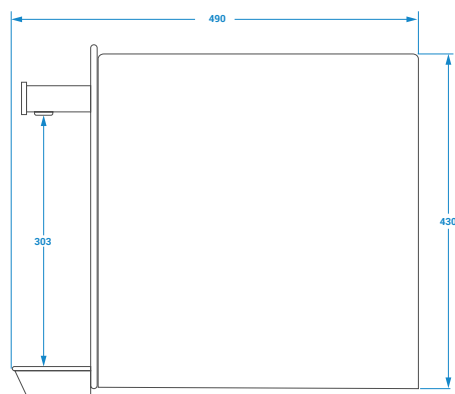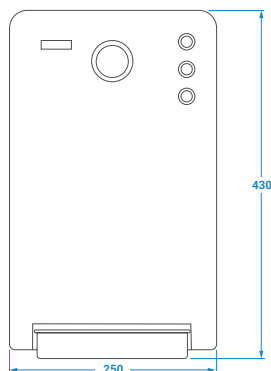

Cooling capacity *	20 l/h
Delta temperature **	10° C
Maximum continuous delivery	7 l
Pump	65 w
Cooling technology	Hermetic Saturator 5,5 l
Condensation	Slow ventilation
Refrigerant gas	R134a R1234xy ***
Inlet pressure	3 bars
Adjustable thermostat	Yes
Power consumption	220W 50 - 60 hz
Potenza assorbita	145 W

Working temperature	Min 5° C - Max 35° C
Water inlet pipe	8 mm
CO ₂ inlet pipe	6 mm
Height of the dispensing area	303 mm
Type	Soprabanco Sottobanco
Drip tray	Stainless steel
Net weight	16 kg
Dispensing options	Still water at room temperature, still cold and sparkling cold water
Material	sheet metal hot-dip galvanised
Compressor power	1/12 CC ²
Dimensions WxDxH May vary depending on models	250x490x422 mm

*Inlet water temperature of 20° C

**Delta is the water temperature difference between inlet and outlet

*** Upon request

AVAILABLE IN THE FOLLOWING COLOURS



CERTIFICATIONS



D.M. 174