



EROGATORE

PRESTIGIO OF

Quiet and compact, GWS Industries domestic water dispensers meet the growing demand of the domestic dispensing market by covering a wide segment of needs. They are available in undercounter and overcounter versions, with internal or external carbonation-filtration unit.



ELEGANT



ECOLOGICAL





SILENT



SUSTAINABLE

IN

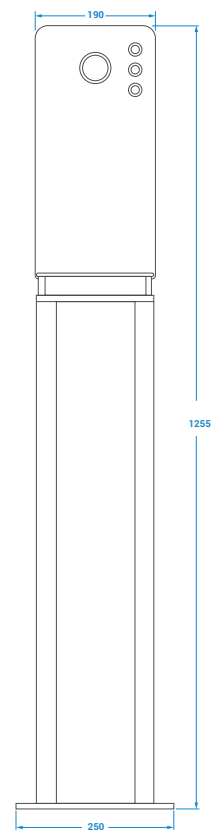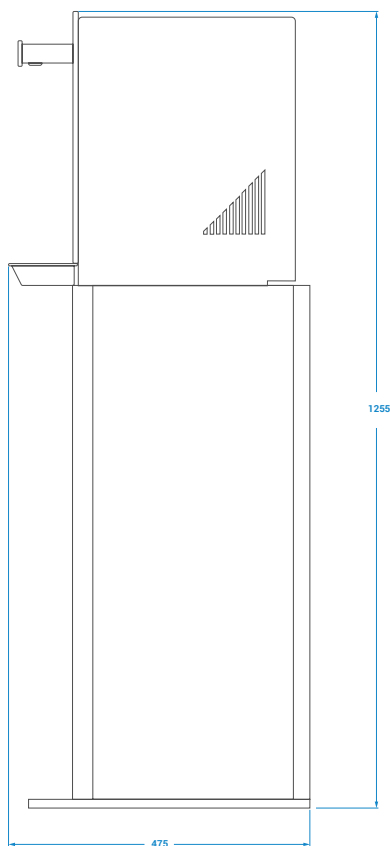

Cooling capacity *	10 l/h
Delta temperature **	10° C
Maximum continuous delivery	5 l
Pump	Membranes 24V DC
Cooling technology	Hermetic Saturator 2,2 l
Condensation	Static
Refrigerant gas	R134a R1234xy ***
Inlet pressure	3 bars
Adjustable thermostat	Yes
Power supply	220W 50 - 60 hz
Power consumption	145 W

*Inlet water temperature of 20° C

**Delta is the water temperature difference between inlet and outlet

*** Upon request

Working temperature	Min 5° C - Max 35° C
Water inlet pipe	8 mm
CO ₂ inlet pipe	6 mm
Height of the dispensing area	303 mm
Type	Overcounter Undercounter
Drip tray	Stainless steel
Net weight	12 kg
Dispensing options	Still water at room temperature, still cold and sparkling cold water
Material	sheet metal hot-dip galvanised
Compressor power	1/12 CC ²
Dimensions WxDxH	190x439x1260 mm

AVAILABLE IN THE FOLLOWING COLOURS



CERTIFICATION



D.M. 174