



DISPENSER

PRESTIGIO RO

Quiet and compact, GWS Industries domestic water dispensers meet the growing demand of the domestic dispensing market by covering a wide segment of needs. They are available in undercounter and overcounter versions, with internal or external carbonation-filtration unit.



ELEGANT



ECOLOGICAL





SILENT





SUSTAINABLE

IN

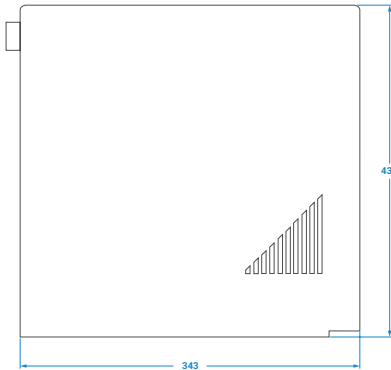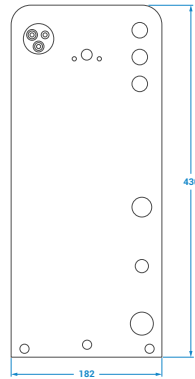

UP

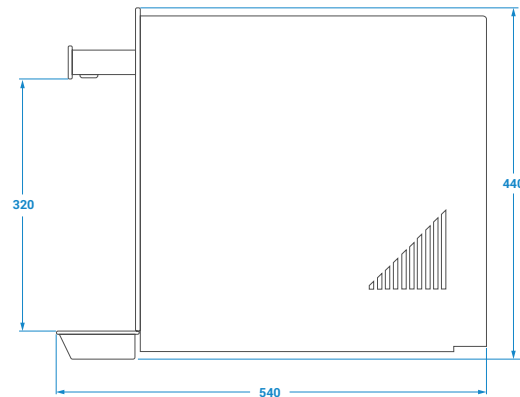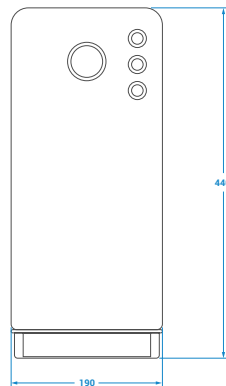

Cooling capacity *	10 l/h
Delta temperature **	10° C
Maximum continuous delivery	5 l
Pump / Motor	Pa 300 / 180 W
Cooling technology	Hermetic Saturator 2,2 l
Condensation	Static
Refrigerant gas	R134a R1234xy ***
Inlet pressure	3 bars
Adjustable thermostat	Yes
Power supply	220W 50 - 60 hz
Power consumption	180 W
Osmosis system	Double membrane 180 GPD

Working temperature	Min 5° C - Max 35° C
Water inlet pipe	10 mm
CO ₂ inlet pipe	6 mm
Exhaust pipe	4 mm
Height of the dispensing area	303 mm
Type	Overcounter Undercounter
Drip tray	Stainless steel
Net weight	18 kg
Material	sheet metal hot-dip galvanised
Compressor power	1/12 CC ²
Dimensions WxDxH May vary depending on models	190x522x422 mm
Prefiltration	Exterior

*Inlet water temperature of 20° C

**Delta is the water temperature difference between inlet and outlet

*** Upon request

AVAILABLE IN THE FOLLOWING COLOURS



CERTIFICATIONS

