



DISPENSER

SPLENDIDA

Quiet and compact, GWS Industries domestic water dispensers meet the growing demand of the domestic dispensing market by covering a wide segment of needs. They are available in undercounter and overcounter versions, with internal or external carbonation-filtration unit.



ELEGANT



ECOLOGICAL





SILENT





SUSTAINABLE

IN

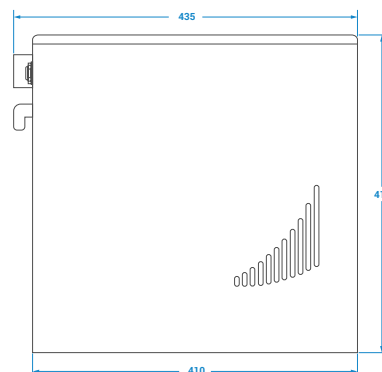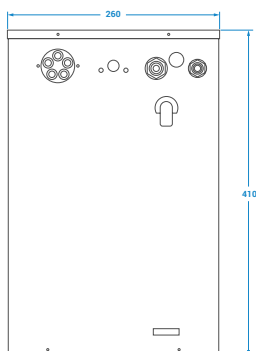

UP

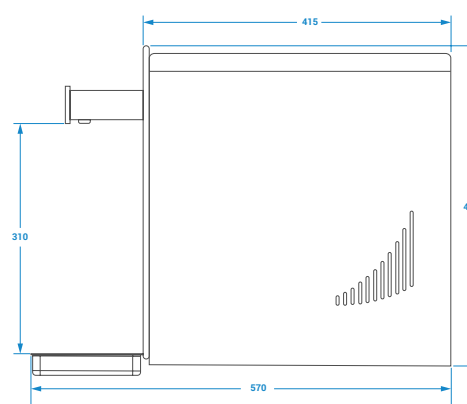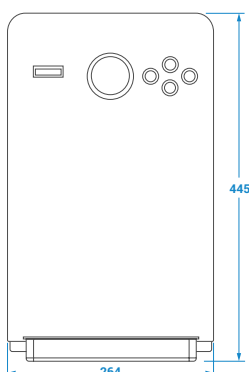

Cooling capacity *	50 - 70 l/h
Delta temperature **	15 - 10° C
Maximum continuous delivery	30 - 40 l
Pump/ Motor	Volumetric 300 l/h / Brushless
Cooling technology	Ice bank 12 l 3.5 kg ice
Condensation	Forced ventilation
Refrigerant gas	R134a R1234xy ***
Inlet pressure	3 bars
Adjustable thermostat	Yes
Power supply	230 V 50 Hz
Power consumption	230 W

Working temperature	Min 5° C - Max 35° C
Water inlet pipe	8 mm
CO ₂ inlet pipe	6 mm
Height of the dispensing area	310 mm
Type	Countertop Undercounter
Drip tray	Stainless steel
Net weight	21 kg
Dispensing options	Still water at room temperature, still cold and sparkling cold water
Material	sheet metal hot-dip galvanised
Compressor power	1/6 HP cc 4.5 165 W
Dimensions WxDxH May vary depending on models	264 x 565 x 440 mm

*Inlet water temperature of 20° C

**Delta is the water temperature difference between inlet and outlet

***On request

AVAILABLE IN THE FOLLOWING COLOURS



CERTIFICATIONS

