




ELEGANTE_{RD}

DOSING SETTINGS ON ROUND DISPLAY

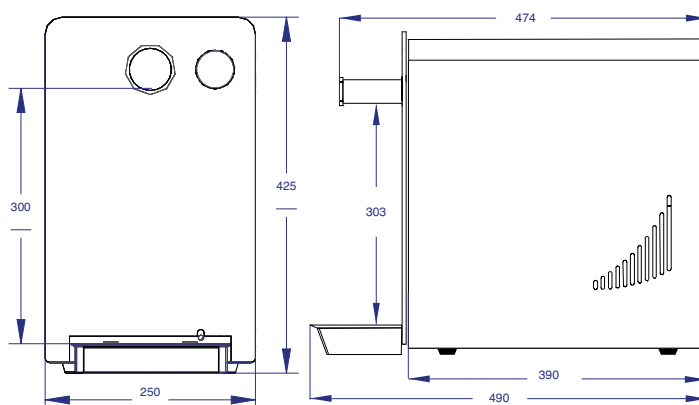

Cooling capacity *	25 l/h
Delta temperature *	10° C
Max continuous supply	7 l
Pump	65w
Cooling technology	Hermetic saturator 5.5 l
Condensation	Ventilation
Refrigerant gas	R1234 xy
Inlet Pressure	3 bars
Adjustable thermostat	Yes
Supply	220w 50-60 Hz
Compressor power	1/10 CC2
Absorbed power	145W

Hot water	Extra hot 95°C
Hot water tank	0.9 l
Working room temperature	Min 5°C - Max 35°C
Inlet water pipe	8 mm
Inlet CO ² pipe	6 mm
Dispensing area height	303 mm
Drip tray	Stainless steel
Net weight	16 kg
Dimensions WxDxH	250 x 490 x 425 mm
May vary depending on models	
Materials	Hot painted metal sheet

*inlet water temp of 20°C; Delta is the difference temperature between inlet and outlet water

OPTIONAL

- Personalised front panel
- UV led on POU
- Cabinet

CERTIFICATION



D.M. 174

	MF20RD LF	MF20RD LFG	MF20RD LFH	MF20RD LFGH
	✓	✓	✓	✓
	✓	✓	✓	✓
		✓		✓
			✓	✓



Made in Italy